


Male O-Seal Tube Adapter AAM-UO

M Tube Fitting

1 / 1
PAGE

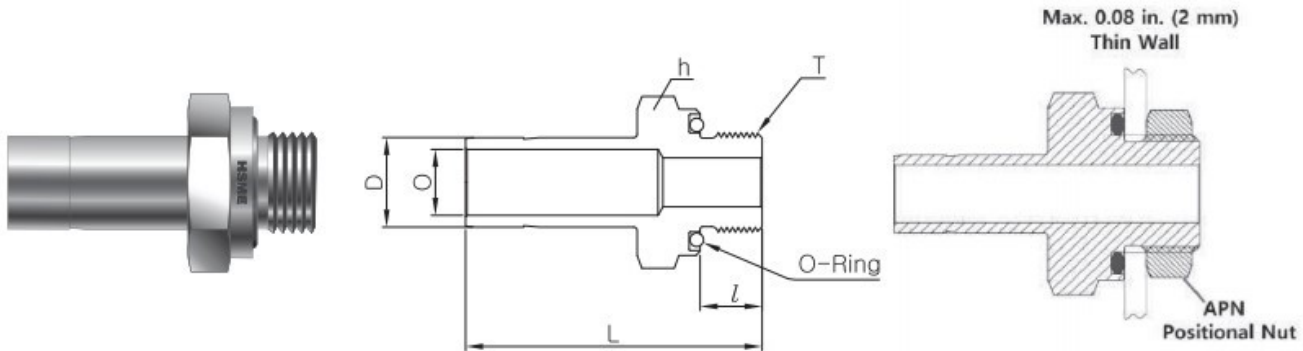

Unique Application
On thin wall tanks or vessels, O-Seal fitting works as a leak-tight bulkhead fitting along with a positionable nut - **APN** without brazing or welding.

Connects fractional M Tube fitting port to SAE straight thread boss

| Part No. | Tube O.D. | | T U | O Min | Width Across Flat | | | | O-Ring Uniform Size Number |
|----------|-----------|------|---------|----------|-------------------|-------|-------|-------|----------------------------------|
| | D | | | | h | | l | L | |
| | in | mm | | | in | mm | | | |
| AAM2-2UO | 1/8 | 3.17 | 5/16-24 | 2.03 | 9/16 | 14.28 | 8.63 | 32.51 | -011 |
| AAM3-3UO | 3/16 | 4.76 | 3/8-24 | 3.05 | 5/8 | 15.87 | 9.65 | 35.05 | -012 |
| AAM4-4UO | 1/4 | 6.35 | 7/16-20 | 4.32 | 3/4 | 19.05 | 10.41 | 39.11 | -013 |
| AAM5-5UO | 5/16 | 7.52 | 1/2-20 | 5.59 | 7/8 | 22.22 | 11.17 | 41.65 | -112 |
| AAM6-6UO | 3/8 | 9.52 | 9/16-18 | 6.85 | 15/16 | 23.81 | 11.93 | 43.18 | -113 |
| AAM8-8UO | 1/2 | 12.7 | 3/4-16 | 9.4 | 1-1/8 | 28.57 | 11.93 | 49.53 | -116 |