

Check Valve

VALVE

PAGE

1 / 1

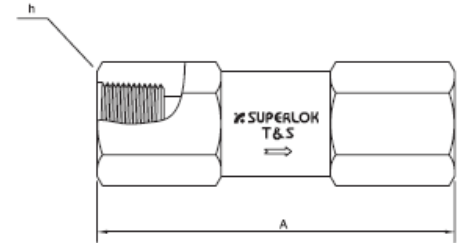
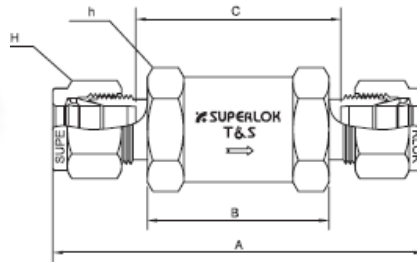


TABLE OF DIMENSIONS

Order Number			Dimensions (mm)					
Series	Part No.	End Connection	A	B	C	h	H	
	S 2	1/8 SUPERLOK	57.15	26.6	31.2	15.88	11.11	
	F 2N	1/8 Female NPT	50.00	-	-	15.88	-	
	S 4	1/4 SUPERLOK	62.16	26.6	31.4	15.88	14.28	
	F 4N	1/4 Female NPT	57.10	-	-	19.05	-	
	S 6	3/8 SUPERLOK	76.20	37.6	42.4	22.22	17.46	
	F 6N	3/8 Female NPT	73.90	-	-	22.22	-	
SPCV	S 8	1/2 SUPERLOK	86.58	42.9	40.8	25.40	22.22	
	F 8N	1/2 Female NPT	90.60	-	-	27.00	-	
	S 10	5/8 SUPERLOK	91.68	48.0	42.8	28.50	25.40	
	S 12	3/4 SUPERLOK	99.78	56.1	51.1	31.80	28.57	
	F 12N	3/4 Female NPT	99.78	-	-	31.80	-	
	S 16	1 SUPERLOK	111.22	58.4	48.9	38.10	38.1	
	F 16N	1 Female NPT	114.30	-	-	41.27	-	

TECHNICAL DATA

End Connection Size	Nominal Cracking Pressure	Maximum Working Pressure (21°C / 70°F)	Maximum Back Pressure (21°C/ 70°F)
1/8, 1/4		3000 PSI	1000 PSI
3/8, 1/2, 5/8	0.5, 1, 10, 25 PSI	3000 PSI	200 PSI
3/4, 1		2000 PSI	200 PSI